

EMSA Mobile Lighting Tower

Generator set is mounted on a trailer with a torsion axle, automatic braking equipment. There are 4-6 pieces of metal halide projector. Vertical tower is galvanized, mechanically reaches a height of 9 m. Each set has four pillars of stability. Each lamp consists of on/off switches There is a 220 V. socket on a protection canopy










9 m.

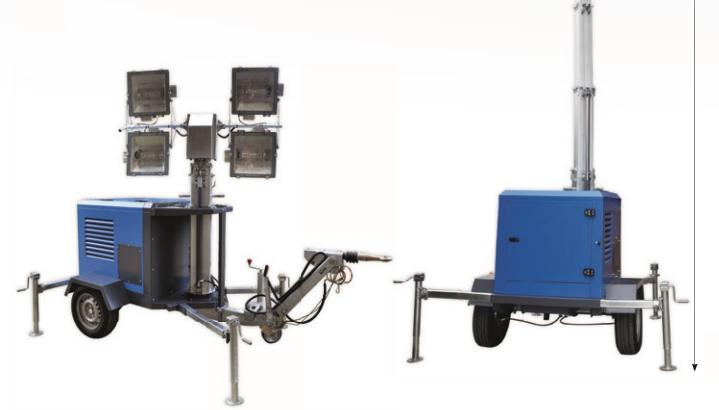

EMSA Mobile Lighting Tower

EMSA Mobile Lighting Tower

MODEL	AYEW 13	AYEW 17
ТҮРЕ	MECHANICAL / HYDRAULIC	
VOLTAGE	220 / 380	
FREQUENCY	50	
BRAND	KUBOTA	EMSA
TYPE	D11005 - BG2	YND 485 D
POWER (PRIME) kW	8.4	19
SPEED (rpm)	1500	
DISPLACEMENT (It)	1,123	2,156
BORE & STROKE (mm x mm)	78 x 78,4	85 x 95
NUMBER OF CYLINDERS	3	4
GOVERNOR TYPE	MECHANICAL	
INDUCTION	NATURAL	
COMBUSTION SYSTEM	DIRECT INJECTION	
FUEL CONSUMPTION	2,0	5,62
BRAND	NSM	ENGGA
ТҮРЕ	PMG-LT (185F) 2000	EG160-16N2
POWER (kW)	4,7	17,6
FREQUENCY (Hz.)	50	50
VOLTAGE	220	220/380
INSULATION SYSTEM	Н	Н
PROTECTION	IP23	IP23
	TYPE VOLTAGE FREQUENCY BRAND TYPE POWER (PRIME) KW SPEED (rpm) DISPLACEMENT (It) BORE & STROKE (mm x mm) NUMBER OF CYLINDERS GOVERNOR TYPE INDUCTION COMBUSTION SYSTEM FUEL CONSUMPTION BRAND TYPE POWER (kW) FREQUENCY (Hz.) VOLTAGE INSULATION SYSTEM	TYPE MECHANICAL VOIAGE 220 / FREQUENCY 5 BRAND KUBOTA TYPE D11005 - B62 POWER (PRIME) kW 8.4 SPEED (rpm) 15 DISPLACEMENT (It) 1,123 BORE & STROKE (mm x mm) 78 x 78.4 NUMBER OF CYLINDERS 3 GOVERNOR TYPE MECHA INDUCTION NATU COMBUSTION SYSTEM DIRECT IN FUEL CONSUMPTION 2,0 BRAND NSM TYPE PMG-LT (185F) 2000 POWER (KW) 4,7 FREQUENCY (Hz.) 50 VOLIAGE 220 INSULATION SYSTEM H

Emsa reserves the right to make changes in model, technical specifications, color, equipment & accessories without prior notice.













